





# TRUF BEARINGS LIMITED

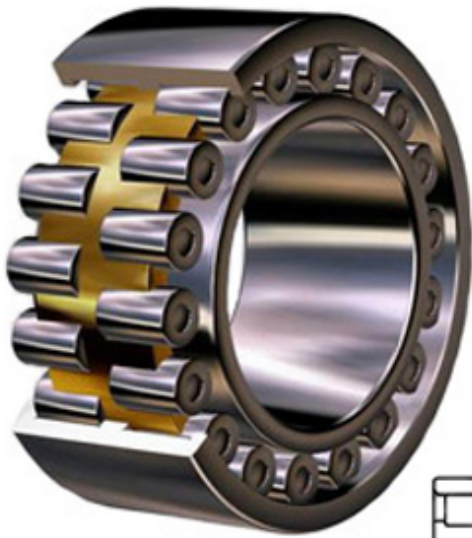

NN3013KC1NAP5 Bearing 2D drawings and 3D CAD models

2.559 Inch | 65 Millimeter x 3.937 Inch | 100 Millimeter x 1.024 Inch | 26 Millimeter NTN NN3013KC1NAP5 Cylindrical Roller Bearings

Bearing No. NN3013KC1NAP5

Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight	0.695
EAN	4547359130553
Product Group	B04270
Bore Profile	Tapered
Cage Material	Brass
Precision Class	RBEC 5   ISO P5
Number of Rows of Rollers	Double Row
Separable	Outer Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C1NA
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	3 Rib Inner Ring   Plain Outer Ring   Precision Bearing   Cage on Inner Ring OD
Long Description	65MM Bore; Tapered Bore Profile; 100MM Outside



## TRUF BEARINGS LIMITED

	Diameter; 26MM Width; Brass Cage Material; RBEC 5   ISO P5; Double Row; Outer Ring - Both Sides Separable; No Snap Ring; Relubricatable; C1NA Internal C
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	NN3013KC1NAP5
Weight / LBS	1.536
d	2.559 Inch   65 Millimeter
B	1.024 Inch   26 Millimeter
D	3.937 Inch   100 Millimeter
bore diameter:	65 mm
maximum rpm:	7300 rpm
outside diameter:	100 mm
bearing material:	Hardened Alloy Steel
overall width:	26 mm
cage material:	High Strength, 2 piece, Machined Brass
flanges:	(3) Inner Ring
finish/coating:	Uncoated
bore type:	Tapered 1:12
closure type:	Open
number of rows:	2
resistance features:	Clean Room, Vacuum
internal clearance:	C1NA
outer ring width:	26 mm
operating temperature range:	-40 to 120 ° C



## TRUF BEARINGS LIMITED

fillet radius:	1.1 mm
dynamic load capacity:	75000 N
series:	NN30K
static load capacity:	111000 N
manufacturer product page:	<a href="#">Click here</a>
precision rating:	ISO Class 5